


Plain 3K

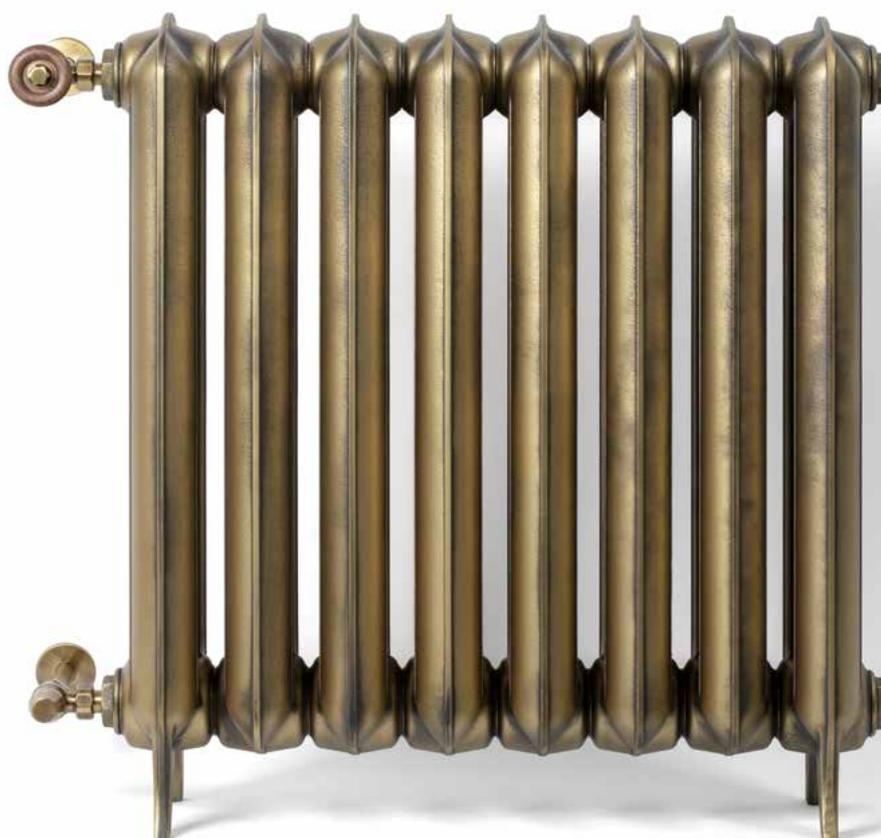

Radiator

Free standing Plain 3K 720↑ x 688↔ LP, colour: antique brass

Valves and accessories

Angled thermostatic valve set Wood, brushed bronze

Pipe masking set – 160 mm, brushed bronze

Plain 3K



Plain 3K








Connections:




Available sizes:


Wall mounted

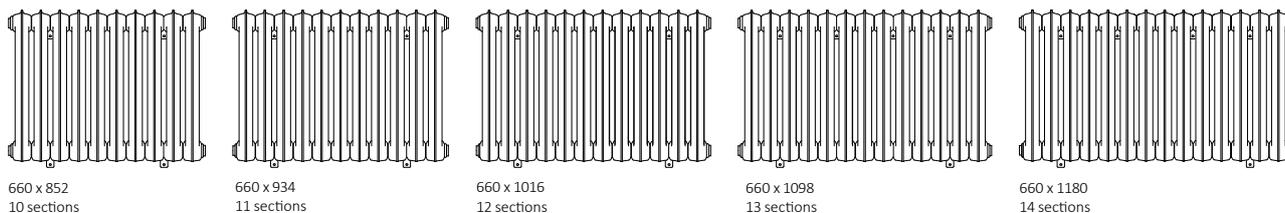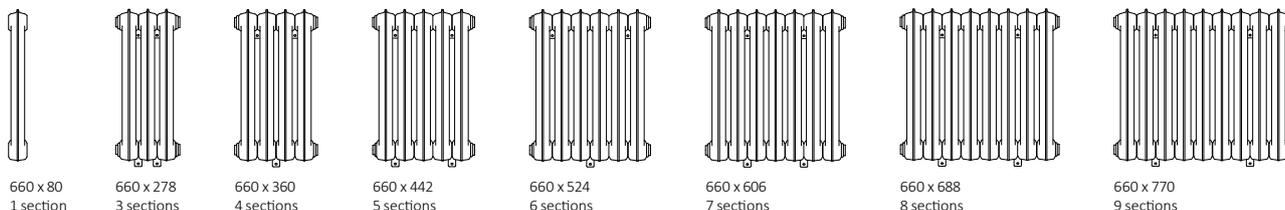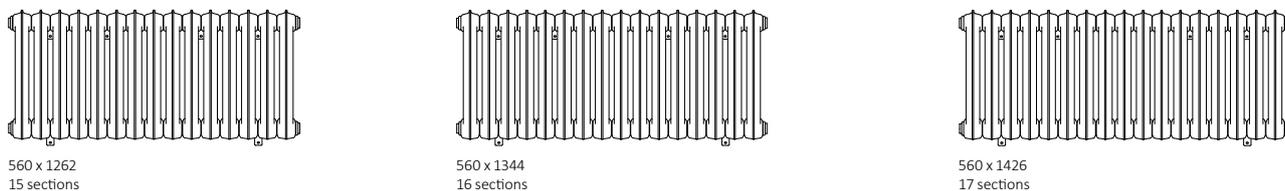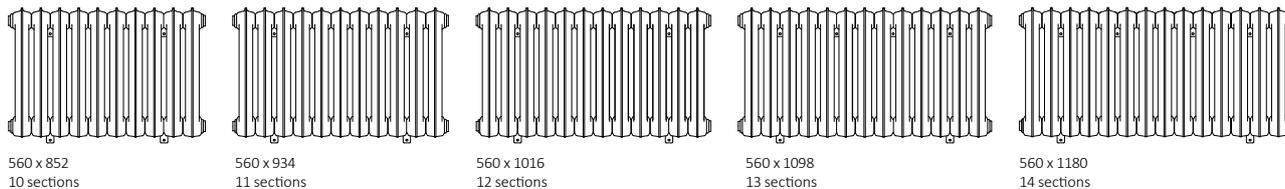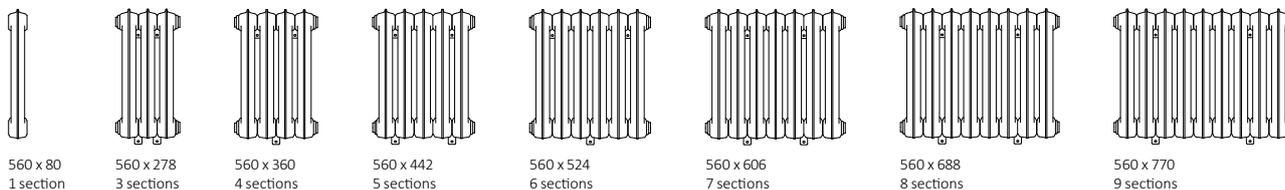


Plain 3K



660 x 1262
15 sections




660 x 1344
16 sections




660 x 1426
17 sections




860 x 80
1 section




860 x 278
3 sections




860 x 360
4 sections




860 x 442
5 sections




860 x 524
6 sections




860 x 606
7 sections




860 x 688
8 sections




860 x 770
9 sections




860 x 852
10 sections




860 x 934
11 sections




860 x 1016
12 sections




860 x 1098
13 sections




860 x 1180
14 sections



860 x 1262
15 sections



860 x 1344
16 sections




860 x 1426
17 sections


Plain 3K




Free standing

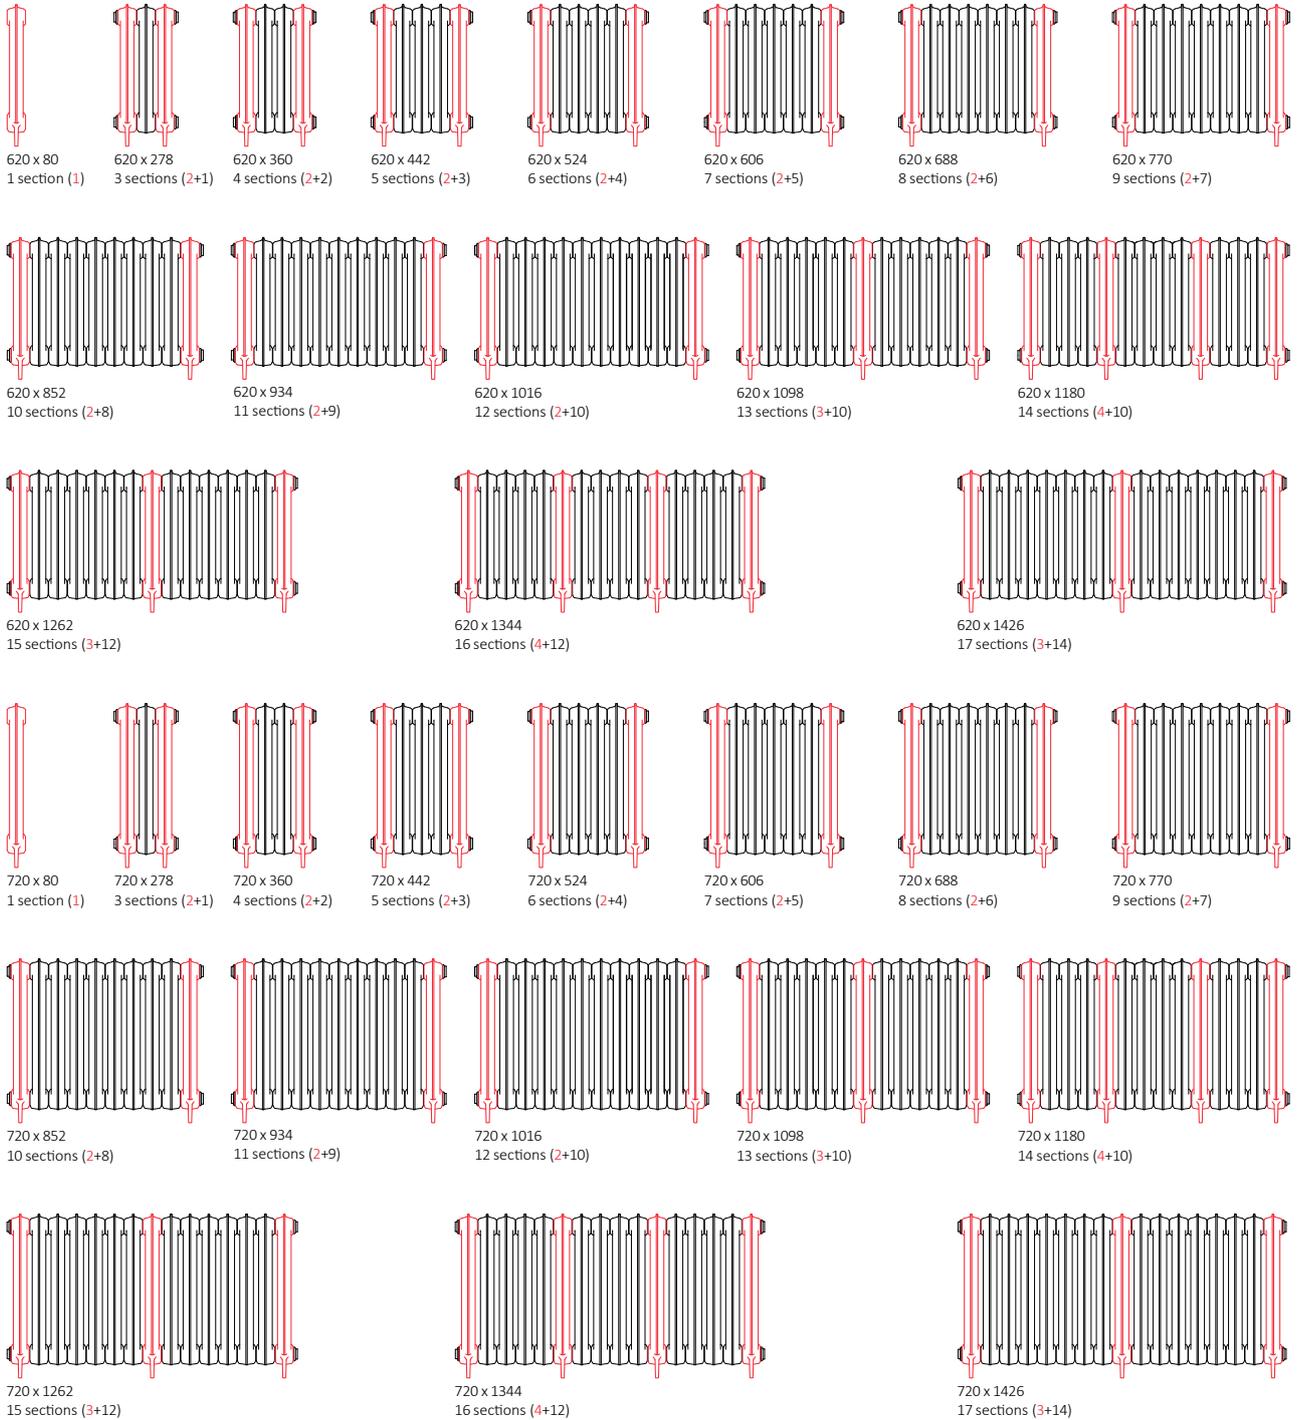


Plain 3K

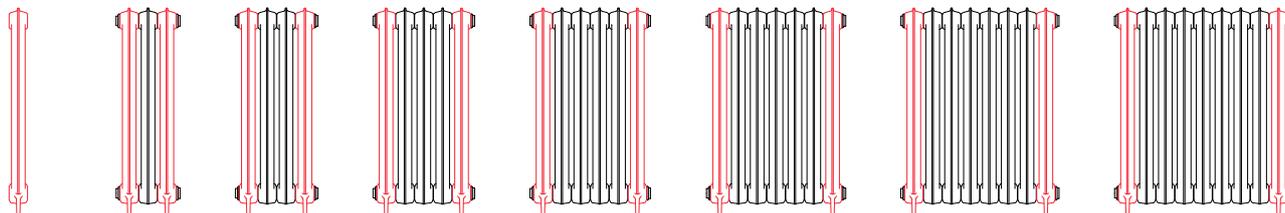

920 x 80 1 section (1) 920 x 278 3 sections (2+1) 920 x 360 4 sections (2+2) 920 x 442 5 sections (2+3) 920 x 524 6 sections (2+4) 920 x 606 7 sections (2+5) 920 x 688 8 sections (2+6) 920 x 770 9 sections (2+7)

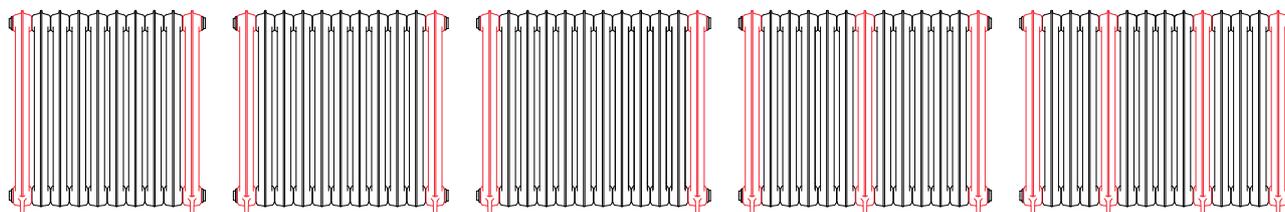

920 x 852 10 sections (2+8) 920 x 934 11 sections (2+9) 920 x 1016 12 sections (2+10) 920 x 1098 13 sections (3+10) 920 x 1180 14 sections (4+10)

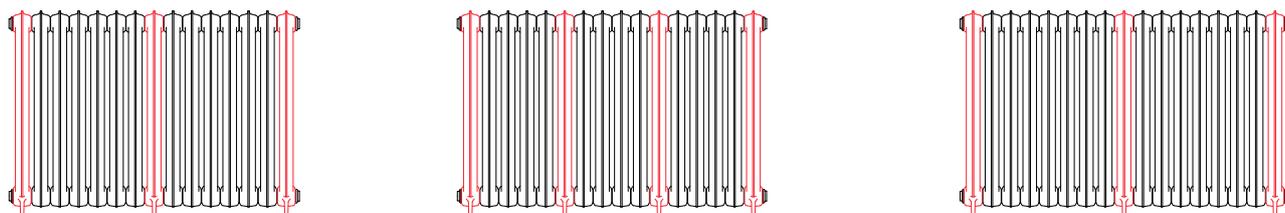

920 x 1262 15 sections (3+12) 920 x 1344 16 sections (4+12) 920 x 1426 17 sections (3+14)



Technical data:

Working pressure: 1000 kPa Max. working temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	H [dm³]	[kg]	Product code <small>(Configuration code p. 12)</small>
Wall mounted										
560	80	460	119	63	—	—	—	2,60	9,92	WGP3B056008
560	278	460	357	190	82	98	—	7,80	31,07	WGP3B056027
560	360	460	476	253	—	98	—	10,40	41,19	WGP3B056036
560	442	460	595	316	246	98	—	13,00	51,31	WGP3B056044
560	524	460	714	380	—	98	—	15,60	61,42	WGP3B056052
560	606	460	833	443	246	180	—	18,20	71,54	WGP3B056060
560	688	460	952	506	328	180	—	20,80	81,66	WGP3B056068
560	770	460	1071	569	410	180	—	23,40	91,77	WGP3B056077
560	852	460	1190	633	492	180	—	26,00	101,89	WGP3B056085
560	934	460	1309	696	574	180	164	28,60	112,01	WGP3B056093
560	1016	460	1428	759	656	180	164	31,20	122,13	WGP3B056101
560	1098	460	1547	822	738	180	246	33,80	132,24	WGP3B056109
560	1180	460	1666	886	820	180	246	36,40	142,36	WGP3B056118
560	1262	460	1785	949	902	180	246	39,00	152,48	WGP3B056126
560	1344	460	1904	1012	984	180	246	41,60	162,60	WGP3B056134
560	1426	460	2023	1075	1066	180	246	44,20	172,71	WGP3B056142
660	80	560	138	72	—	—	—	2,90	11,84	WGP3B066008
660	278	560	414	217	82	98	—	8,70	36,84	WGP3B066027
660	360	560	552	290	—	98	—	11,60	48,87	WGP3B066036
660	442	560	690	362	246	98	—	14,50	60,91	WGP3B066044
660	524	560	828	435	—	98	—	17,40	72,95	WGP3B066052
660	606	560	966	507	246	180	—	20,30	84,99	WGP3B066060
660	688	560	1104	580	328	180	—	23,20	97,03	WGP3B066068
660	770	560	1242	652	410	180	—	26,10	109,07	WGP3B066077
660	852	560	1380	725	492	180	—	29,00	121,10	WGP3B066085
660	934	560	1518	797	574	180	164	31,90	133,14	WGP3B066093
660	1016	560	1656	870	656	180	164	34,80	145,18	WGP3B066101
660	1098	560	1794	942	738	180	246	37,70	157,22	WGP3B066109
660	1180	560	1932	1015	820	180	246	40,60	169,26	WGP3B066118
660	1262	560	2070	1087	902	180	246	43,50	181,30	WGP3B066126
660	1344	560	2208	1160	984	180	246	46,40	193,33	WGP3B066134
660	1426	560	2346	1232	1066	180	246	49,30	205,37	WGP3B066142
860	80	760	176	92	—	—	—	3,80	15,38	WGP3B086008
860	278	760	528	277	82	98	—	11,40	47,46	WGP3B086027
860	360	760	704	369	—	98	—	15,20	63,04	WGP3B086036
860	442	760	880	462	246	98	—	19,00	78,62	WGP3B086044
860	524	760	1056	554	—	98	—	22,80	94,20	WGP3B086052

Plain 3K



A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	H [dm ³]	Weight [kg]	Product code <small>(Configuration code p. 12)</small>
860	606	760	1232	647	246	180	–	26,60	109,78	WGP3B086060
860	688	760	1408	739	328	180	–	30,40	125,36	WGP3B086068
860	770	760	1584	831	410	180	–	34,20	140,94	WGP3B086077
860	852	760	1760	924	492	180	–	38,00	156,52	WGP3B086085
860	934	760	1936	1016	574	180	164	41,80	172,10	WGP3B086093
860	1016	760	2112	1108	656	180	164	45,60	187,68	WGP3B086101
860	1098	760	2288	1201	738	180	246	49,40	203,25	WGP3B086109
860	1180	760	2464	1293	820	180	246	53,20	218,83	WGP3B086118
860	1262	760	2640	1385	902	180	246	57,00	234,41	WGP3B086126
860	1344	760	2816	1478	984	180	246	60,80	249,99	WGP3B086134
860	1426	760	2992	1570	1066	180	246	64,60	265,57	WGP3B086142
Free standing										
620	80	460	119	63	–	–	–	2,60	10,52	WGP3F062008
620	278	460	357	190	–	–	–	7,80	32,27	WGP3F062027
620	360	460	476	253	–	–	–	10,40	42,39	WGP3F062036
620	442	460	595	316	–	–	–	13,00	52,51	WGP3F062044
620	524	460	714	380	–	–	–	15,60	62,62	WGP3F062052
620	606	460	833	443	–	–	–	18,20	72,74	WGP3F062060
620	688	460	952	506	–	–	–	20,80	82,86	WGP3F062068
620	770	460	1071	569	–	–	–	23,40	92,97	WGP3F062077
620	852	460	1190	633	–	–	–	26,00	103,09	WGP3F062085
620	934	460	1309	696	–	–	–	28,60	113,21	WGP3F062093
620	1016	460	1428	759	–	–	–	31,20	123,33	WGP3F062101
620	1098	460	1547	822	–	–	–	33,80	134,04	WGP3F062109
620	1180	460	1666	886	–	–	–	36,40	144,76	WGP3F062118
620	1262	460	1785	949	–	–	–	39,00	154,28	WGP3F062126
620	1344	460	1904	1012	–	–	–	41,60	165,00	WGP3F062134
620	1426	460	2023	1075	–	–	–	44,20	174,51	WGP3F062142
720	80	560	138	72	–	–	–	2,90	12,64	WGP3F072008
720	278	560	414	217	–	–	–	8,70	34,24	WGP3F072027
720	360	560	552	290	–	–	–	11,60	46,27	WGP3F072036
720	442	560	690	362	–	–	–	14,50	58,31	WGP3F072044
720	524	560	828	435	–	–	–	17,40	70,35	WGP3F072052
720	606	560	966	507	–	–	–	20,30	82,39	WGP3F072060
720	688	560	1104	580	–	–	–	23,20	94,43	WGP3F072068
720	770	560	1242	652	–	–	–	26,10	106,47	WGP3F072077
720	852	560	1380	725	–	–	–	29,00	118,50	WGP3F072085
720	934	560	1518	797	–	–	–	31,90	130,54	WGP3F072093
720	1016	560	1656	870	–	–	–	34,80	142,58	WGP3F072101
720	1098	560	1794	942	–	–	–	37,70	153,32	WGP3F072109
720	1180	560	1932	1015	–	–	–	40,60	164,06	WGP3F072118
720	1262	560	2070	1087	–	–	–	43,50	177,40	WGP3F072126

Plain 3K




A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	H [dm ³]	⚖️ [kg]	Kod produktu <small>(Kod konfiguracji s. 12)</small>
720	1344	560	2208	1160	—	—	—	46,40	188,13	WGP3F072134
720	1426	560	2346	1232	—	—	—	49,30	201,47	WGP3F072142
920	80	760	176	92	—	—	—	3,80	16,18	WGP3F092008
920	278	760	528	277	—	—	—	11,40	49,06	WGP3F092027
920	360	760	704	369	—	—	—	15,20	64,64	WGP3F092036
920	442	760	880	462	—	—	—	19,00	80,22	WGP3F092044
920	524	760	1056	554	—	—	—	22,80	95,80	WGP3F092052
920	606	760	1232	647	—	—	—	26,60	111,38	WGP3F092060
920	688	760	1408	739	—	—	—	30,40	126,96	WGP3F092068
920	770	760	1584	831	—	—	—	34,20	142,54	WGP3F092077
920	852	760	1760	924	—	—	—	38,00	158,12	WGP3F092085
920	934	760	1936	1016	—	—	—	41,80	173,70	WGP3F092093
920	1016	760	2112	1108	—	—	—	45,60	189,28	WGP3F092101
920	1098	760	2288	1201	—	—	—	49,40	205,65	WGP3F092109
920	1180	760	2464	1293	—	—	—	53,20	222,03	WGP3F092118
920	1262	760	2640	1385	—	—	—	57,00	236,81	WGP3F092126
920	1344	760	2816	1478	—	—	—	60,80	253,19	WGP3F092134
920	1426	760	2992	1570	—	—	—	64,60	267,97	WGP3F092142

Radiator made up of 13 sections and more is delivered in two or more batteries.


Plain 3K



Wall mounted

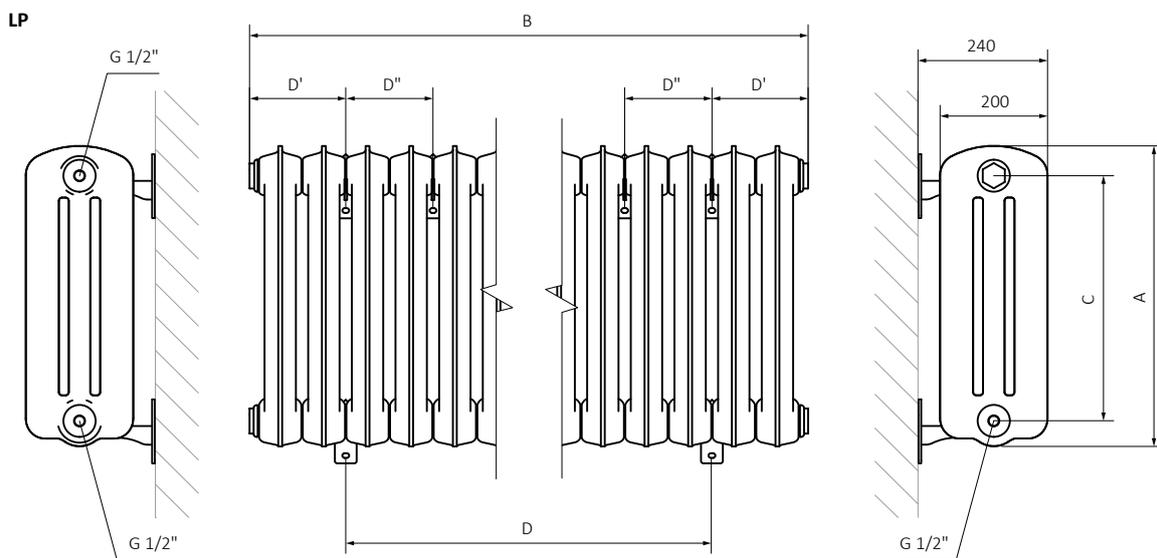

Free standing

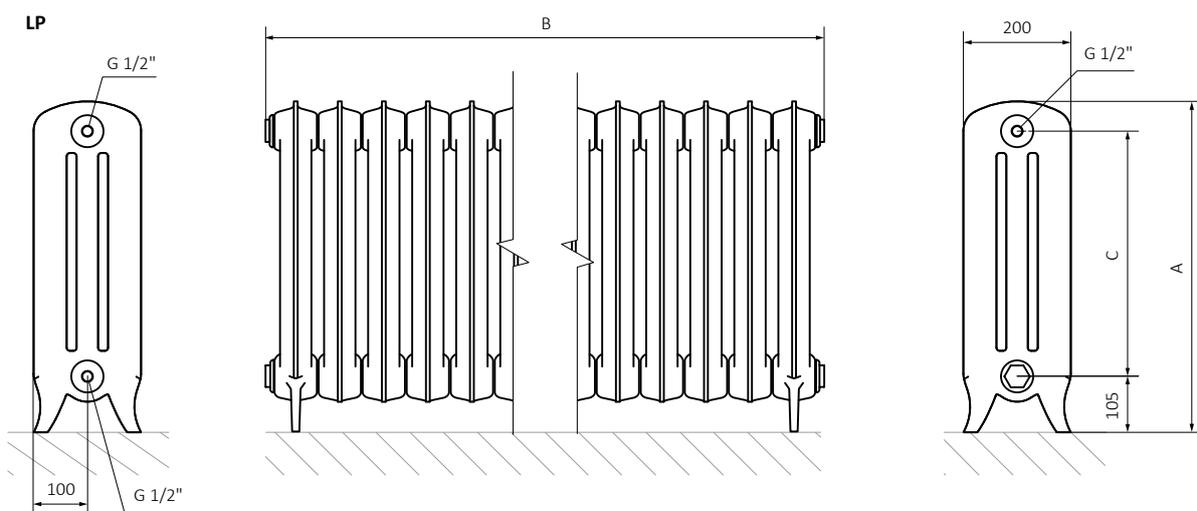

A – height B – width C1-C5 – connections spacing D – wall brackets spacing



Structure of configuration code

Product code can be found in product data sheet tables. The code provides some basic information about the product. To specify detailed specification of the product, configuration code needs to be provided as below:

Structure of the code

WGP3F072068

PRODUCT CODE

(placed in the product data sheet table)

L916LP

CONFIGURATION CODE

(filled manually)

Configuration code

